


Enecom

HF 130
High Flex Line




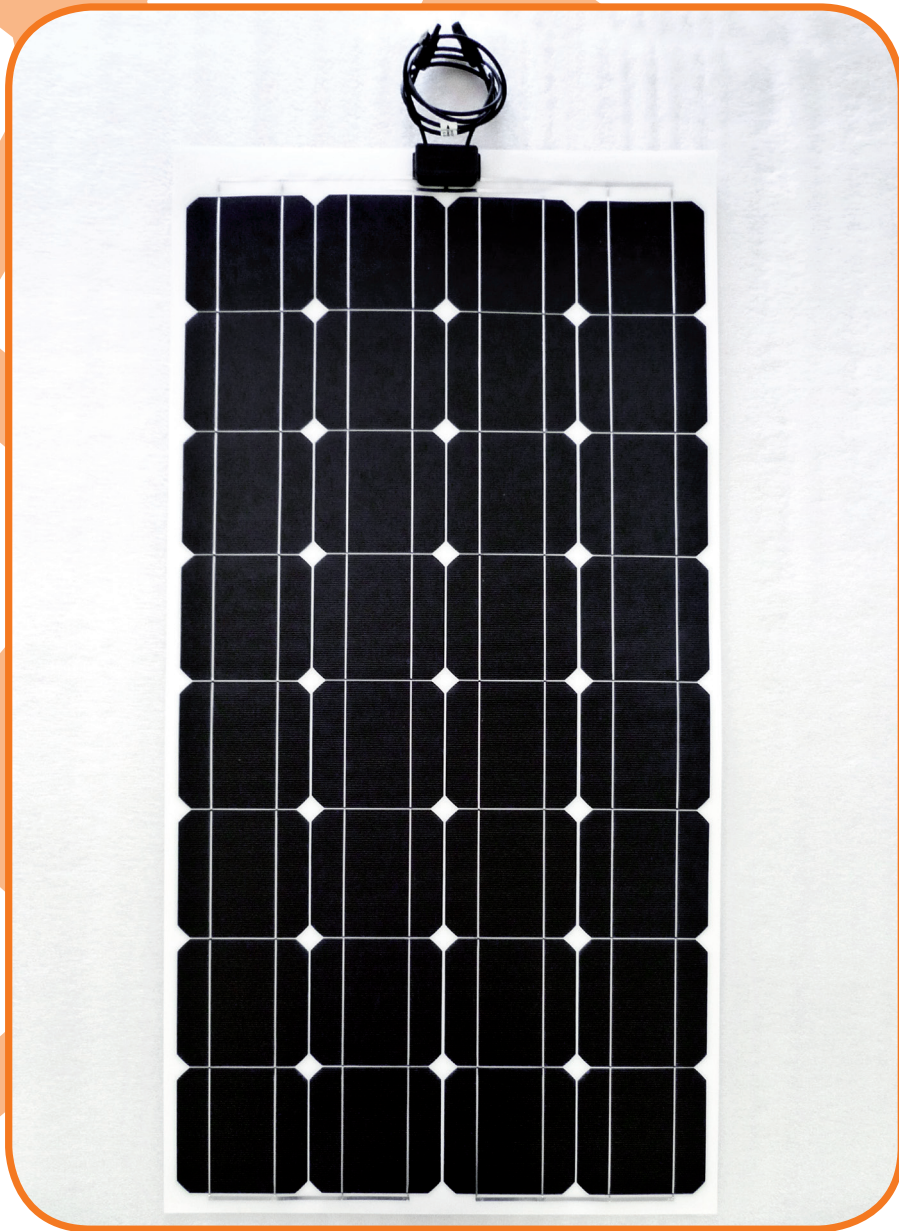

Enecom

HF 130

High Flex Line

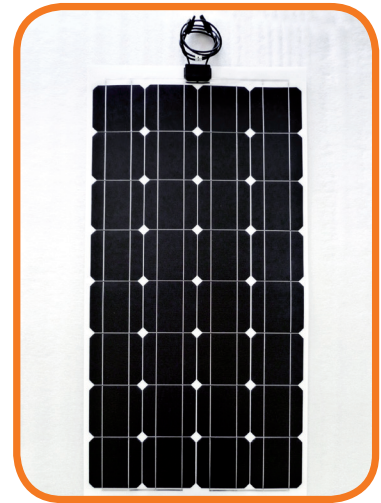

DATA SHEET

Peak power, Pmax (Wp)	130
Tolerance (%)	±3
Open circuit voltage, Voc (V)	20,04
Short circuit current, Isc (A)	8,42
Voltage at Pmax, Vmp (V)	16,76
Current at Pmax, Imp (A)	7,85
Short circuit current temperature coefficient (%/°C)	+0,043
Open circuit voltage temperature coefficient (%/°C)	-0,299
Maximum power temperature coefficient (%/°C)	-0,465
Fill factor (FF) (%)	78
Operating temperature (°C)	-40÷85
NOCT (°C)	47,5
Module material	UV resistant transparent polymer
Size (bxh) (mm)	1350 x 660
Thickness (mm)	1,7
Weight (kg)	2,2
Maximum system voltage (V)	1000
Cells	n.32 m-Si 156x156 2BB
Terminal ends	Cable with universal MC4 plugs
Bypass diode (A)	12



HF Series

This is the standard Enecom panel series. Power ranges from 20Wp to 130Wp. Thanks to the great variety in power and dimension, this series is employed in multiple applications making it the most widely purchased and used.

Enecom gruppo **En-eco**
the energy group

Head Office:
Via O. da Pordenone, 28 / 30 / 32
50127 - Firenze (Italy)
www.enecom-hf.com

Headquarters Firenze: Piazza Marconi, 1 - 50019 - Sesto Fiorentino
Headquarters Torino: Via Emilia, 6 - 10099 - San Mauro Torinese (To)
Headquarters Verona: Via Casette di Camacici, 19 - 37057 - San Giovanni Lupatoto (Vr)